




## **DUSH BCC 0815 4+1**

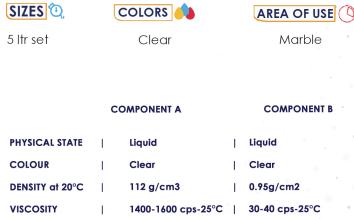

#### **DESCRIPTION:**

**DUSH BCC 0815** is an Epoxy Resin system specifically designed for white and light shades of marble, granite to fill cracks, pinholes, and air cracks without altering the marble's color after polishing. With low viscosity and self-leveling properties, this transparent sealant serves as a ready-made adhesive for filling tiny holes while enhancing the marble's surface gloss.

## **Product Application Photo:**







# Multi surface polish and finishers

# **DUSH BCC 0815 4+1**

#### **INSTRUCTIONS TO USE:**

- 1. Clean the surface by removing all dust and dirt.
- 2. Mix the two components Epoxy and Hardener in 100(Epoxy):25(Hardner) ratio.
- **3.** Apply the mixture on the cleaned surface with putty blade thoroughly to fill cracks and pin holes.
- **4.** Allow it to dry for 24 hours and continue with next steps.

#### **FEATURES AND BENEFITS:**

- 1. Color Preservation: Preserves the natural color of white marble after polishing, ensuring a seamless finish without color alteration.
- **2.** Low Viscosity: Its low viscosity allows easy application, ensuring smooth filling of cracks and pinholes for a flawless appearance.
- **3.** Self-Leveling: Exhibits self-leveling characteristics, providing even coverage and eliminating the need for extensive manual leveling.
- **4.** Transparent Sealant: Acts as a transparent sealant, seamlessly blending with the marble surface while effectively filling tiny holes and imperfections.
- **5.** Surface Gloss Enhancement: Capable of enhancing the surface gloss of marble, DUSH BCC 0815 adds a lustrous finish to the treated area, enhancing its overall aesthetic appeal.

#### **PRECAUTIONS AND NOTES:**

- 1. Wear Hand Gloves.
- 2. Keep Out of Reach of Children.
- 3. Keep the application area enough ventilated.
- 4. Keep the product closed after usage and away from sunlight.
- 5. Always test the product before use.



## **DUSH BCC 0815 4+1**

#### **HANDLING & SHELF-LIFE:**

Keep the tins closed and stored in a cool and ventilated environment at a temperature of 28-35 °C, away from the source of heat. Best Before 12 months.

### **SAFETY RULES:**

Keep the application area enough ventilated. Keep the tins closed after usage and away from sunlight. Please read carefully the safety data sheet before usage. Always test the product before use.

**COMPONENT B** 

#### **TECHNICAL INFORMATION:**

**COMPONENT A PHYSICAL STATE** Liquid Liquid **COLOUR** Clear Clear **DENSITY at 20°C** 112 g/cm3 0.95g/cm2 VISCOSITY 1400-1600 cps-25°C 30-40 cps-25°C

CHARACTERISTICS OF PRODUCT	
Aspect of Product	Clear Liquid
PHR	100:25
Vapour Density	N.A

Toll Free No: 18008910133, E-MAIL: india@dushproducts.com

Website: dushproducts.com

Via Roma, 2 Lancenigo di Villorba-31020, Treviso(TV) ITALY

#### **DISCLAMIER:**

Before using any Dush products, test on a small, inconspicuous area to ensure compatibility and understand the application process. Results may vary based on application methods, surface conditions, and climate factors such as temperature and humidity. While Dush aims to provide high-quality products, we cannot guarantee specific results due to these variables. By using Dush products, you acknowledge and accept that Dush shall not be held liable for any damage or unsatisfactory results arising from their use or misuse.