

DUSH ARENA PRO



SIZES

10 Kg (Part A -8kg and Part B - .2kg)

COLORS

White

AREA OF USE

Marble, Granite & Natural stones

PHYSICAL STATE

Paste


COLOUR

White

DESCRIPTION:

DUSH Arena Pro is a two-component adhesive designed for high-level adhesion between marble, granite, natural stone, and materials like wood, plywood, glass, and metal. This versatile adhesive is easy to use, speeds up work, and ensures a neat finish. It's ideal for various applications where strong, reliable bonding is required between different surfaces.

Product Application Photo:

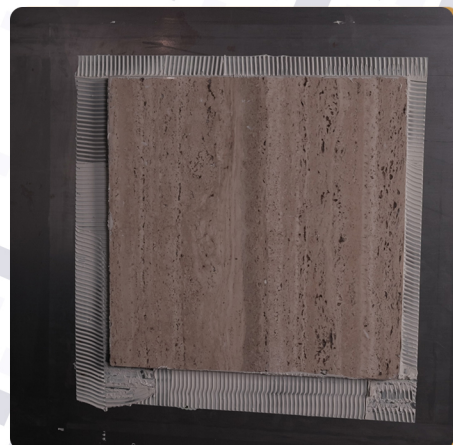

INSTRUCTIONS TO USE:

1. Do not spread adhesive more than 1 sqm at a time, Install the stone on spread bed and continue further area.
2. Apply the mixed adhesive combination to the required depth (between 2 -8mm) using a suitable trowel. Press the tiles gently into position with a slight twisting action, checking periodically that good contact is maintained with the back of each tile. Tiles to be fixed within 15 minutes of adhesive being applied, depending on the porosity of the surface and atmospheric conditions. Leave adequate joints between individual wall and floor tiles. Clean off surplus adhesive from the tile & joints.

FEATURES AND BENEFITS:

1. Strong Adhesion: Provides high-level adhesion between diverse materials, ensuring a durable and secure bond.
2. Versatile Application: Suitable for bonding marble, granite, natural stone to wood, plywood, glass, and metal, making it a versatile solution for various projects.
3. Ease of Use: Designed for easy application, it simplifies the adhesive process, saving time and effort.
4. Neat Finish: Ensures a clean and professional finish, enhancing the overall appearance of the work.
5. Universal Compatibility: Effective in any situation, at any height, for sticking any surface to any surface, making it a reliable choice for diverse bonding needs.

PRECAUTIONS AND NOTES:

1. Wear Hand Gloves.
2. Keep Out of Reach of Children.
3. Keep the application area enough ventilated.
4. Keep the product closed after usage and away from sunlight.
5. Always test the product before use.

HANDLING & SHELF-LIFE:

Keep the tins closed and stored in a cool and ventilated environment at a temperature of 28-35 °C, away from the source of heat. Best Before 12 months.

SAFETY RULES:

Keep the application area enough ventilated. Keep the tins closed after usage and away from sunlight. Please read carefully the safety data sheet before usage. Always test the product before use.

TECHNICAL INFORMATION :

PHYSICAL STATE | Paste

COLOUR | White

CHARACTERISTICS OF PRODUCT	
ASPECT OF THE PRODUCT	
TEMPERATURE RANGE	Part A and B White Paste

INFORMATION ON BASIC PHYSICAL AND CHEMICAL PROPERTIES

Solubility	Immiscible with water	12 °C to 28°C
Initial boiling and range	> 180	
Relative density	1.7 g/cm ²	
Ph value conc.solution	5-8.5	
Flash point	> 150 °C	

PROPERTIES AS PER IS 15477:2019

Tensile strength	2.5N/mm ²
Shear adhesion	6.5 N/mm ²
Open time	65 min
Adjustment time	70 min
Slip	Greater than 0.5mm

PHYSICAL PROPERTIES

Mixing Ratio by weight	4:1
Mixed Appearance	White
Mixed Density	1.5 g/cc
Application temperature	+12°C to + 40°C
Service temperature	+10°C to +30°C
Potlife	70 min

DUSH 

Toll Free No: 18008910133, E-MAIL: india@dushproducts.com

Website: dushproducts.com

Italy 

Via Roma, 2 Lancenigo di Villorba-31020, Treviso(TV) ITALY

DISCLAIMER:

Before using any Dush products, test on a small, inconspicuous area to ensure compatibility and understand the application process. Results may vary based on application methods, surface conditions, and climate factors such as temperature and humidity. While Dush aims to provide high-quality products, we cannot guarantee specific results due to these variables. By using Dush products, you acknowledge and accept that Dush shall not be held liable for any damage or unsatisfactory results arising from their use or misuse.