



## DUSH FixStrong

### SIZES

4 Kg  
(Part A – 3.2 kg  
& Part B – 0.8 kg)

### COLORS

White

### AREA OF USE

Marble, Granite  
& Natural stones



PHYSICAL STATE | Paste

COLOR | White

### DESCRIPTION:

**Dush FixStrong** is a two-component PU adhesive with a special formula containing high-quality ingredients, ensuring extremely strong adhesion, isolation, and flexibility. It is ideal for high-level adhesion between marble, granite, and natural stone to wood, plywood, glass, and metal surfaces. The adhesive is user-friendly, making work faster and ensuring a neat job, suitable for sticking any surface to any surface, at any height, and in any situation.

### Product Application Photo:

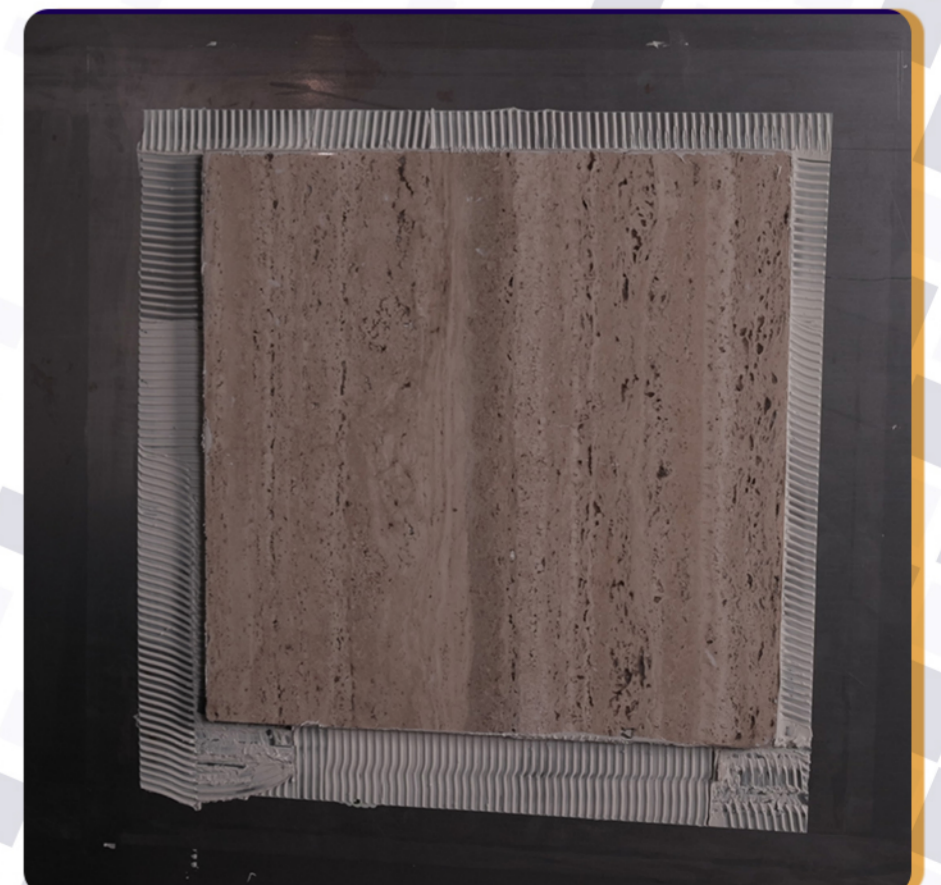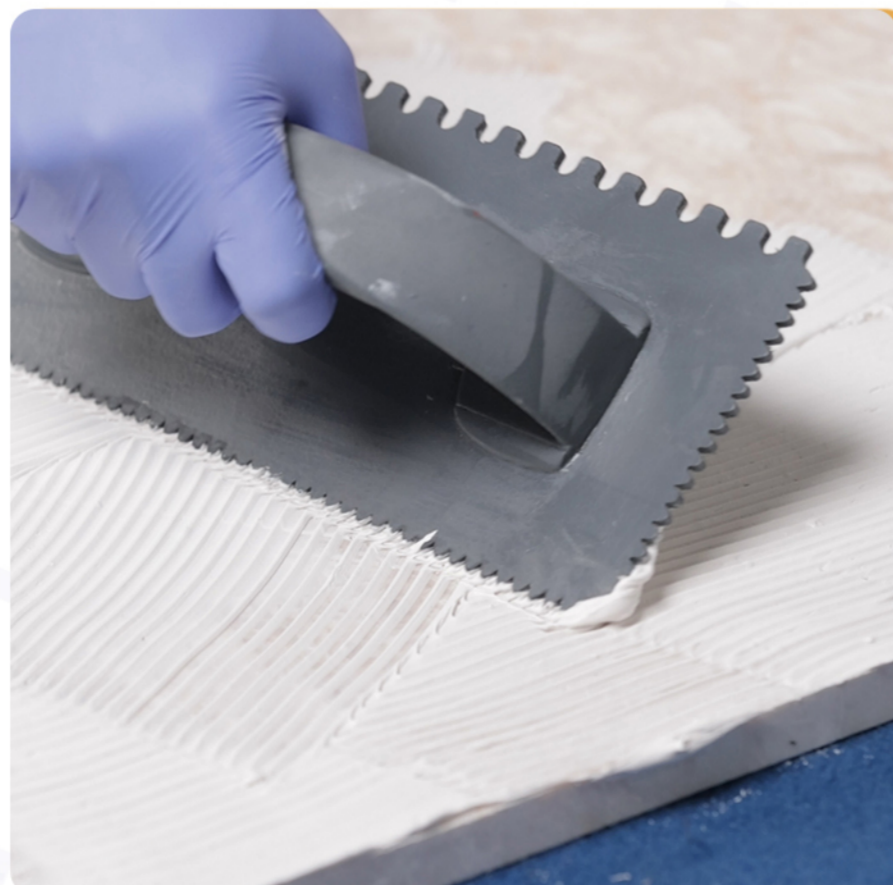

## INSTRUCTIONS TO USE:

1. Do not spread adhesive more than 1 sqm at a time. Install the stone on the spread bed and continue to further areas.
2. Apply the mixed adhesive combination to the required depth (between 2 and 8 mm) using a suitable trowel. Press the tiles gently into position with a slight twisting action, checking periodically that good contact is maintained with the back of each tile. Tiles are to be fixed within 15 minutes of adhesive being applied, depending on the porosity of the surface and atmospheric conditions. Leave adequate joints between individual wall and floor tiles. Clean off surplus adhesive from the tile & joints.

## FEATURES & BENEFITS

1. **Exceptional Strength:** Provides extremely strong adhesion for demanding applications.
2. **Versatile Bonding:** Ideal for bonding various materials, including marble, granite, natural stone, wood, plywood, glass, and metal.
3. **High Flexibility:** Ensures flexibility, accommodating movements, and reducing the risk of cracks.
4. **User-Friendly:** Easy to use, facilitating quicker work and ensuring a neat finish.
5. **Reliable Performance:** Formulated with high-quality ingredients for long-lasting, professional-grade results.

## PRECAUTIONS AND NOTES:

- Wear hand gloves.
- Keep out of reach of children.
- Keep the application area well ventilated.
- Always test the product before use.
- Keep the product closed after usage and away from sunlight.

### HANDLING & SHELF LIFE:

- Keep the tins closed and stored in a cool and ventilated environment at a temperature of 28–35°C, away from the source of heat. Best Before 12 months.

### SAFETY RULES:

- Store in a cool, ventilated space at temperatures between 28 – 35°C, away from heat sources. Best used within 12 months from the date of manufacture.

### TECHNICAL INFORMATION:

**PHYSICAL STATE** | Paste

**COLOUR** | White

CHARACTERISTICS OF PRODUCT	
ASPECT OF THE PRODUCT	Part A and B White Paste
TEMPERATURE RANGE	12 °C to 28 °C

### DUSH

Toll-Free Number: 18008930333  
Email: [india@dushproducts.com](mailto:india@dushproducts.com)  
Website: [dushproducts.com](http://dushproducts.com)

**Italy Office:** Via Roma, 2, Lancenigo di Villorba-31020,  
Treviso (TV), ITALY

### DISCLAIMER:

Before using any Dush products, test on a small, inconspicuous area to ensure compatibility and understand the application process. Results may vary based on application methods, surface conditions, and climate factors such as temperature and humidity. While Dush aims to provide high-quality products, we cannot guarantee specific results due to these variables. By using Dush products, you acknowledge and accept that Dush shall not be held liable for any damage or unsatisfactory results arising from their use or misuse.