



SIZES

20 kg

COLORS

White

AREA OF USE

Tiles

PHYSICAL STATE

Powder


COLOUR

White

DESCRIPTION:

DUSH OMNI is a premium C2 grade cement-based adhesive formulated for the installation of small-size wall tiles and large-area floor tiles. Blending the elegance of Italian design with the durability of Indian minerals, Dush Omni provides exceptional bonding strength, durability, and ease of application. It is ideal for both residential and commercial projects, ensuring long-lasting results even in demanding conditions.

Product Application Photo:

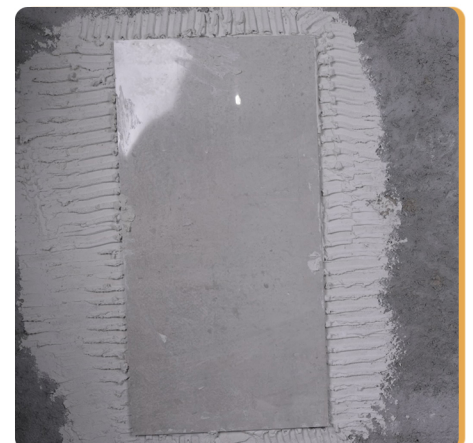

INSTRUCTIONS TO USE:

1. Spread the adhesive evenly on the substrate using a notched trowel.
2. Place the tiles within the open time and adjust them as needed.
3. Ensure full coverage of the tile backs by pressing them firmly into place.
4. Allow the adhesive to cure for at least 24 hours before grouting.

FEATURES AND BENEFITS:

1. High Bond Strength: Offers superior adhesion for wall and floor tiles, ensuring stability and longevity.
2. Versatile Application: Suitable for both small-size wall tiles and large-area floor tiles.
3. Excellent Workability: Smooth texture for easy mixing and application.
4. Water and Heat Resistant: Maintains performance in wet and hot conditions.
5. Italian Essence, Indian Durability: Blends Italian innovation with Indian minerals for robust and reliable performance.

PRECAUTIONS AND NOTES:

1. Wear Hand Gloves.
2. Keep Out of Reach of Children.
3. Keep the application area ventilated enough.
4. Keep the product closed after usage and away from sunlight.
5. Always test the product before use.

TECHNICAL INFORMATION

Composition – Cement-based adhesive with polymer additives and fine aggregates

Color – White

Mixing Ratio – Approx. 5.5 to 6.5 liters of water per 25 kg bag

Pot Life – 2 to 3 hours after mixing

Open Time – 20 minutes

Adjustability Time – 10 to 15 minutes

Grouting Time – After 24 hours

Application Temperature – +5°C to +35°C

Coverage – 5 to 6 m² per 25 kg bag (with 6 mm notch trowel)

Tensile Adhesion Strength – ≥ 0.5 N/mm² (after 28 days)

Slip Resistance – ≤ 0.5 mm

Curing Time – 24 to 48 hours

HANDLING & SHELF-LIFE:

Keep the tins closed and stored in a cool and ventilated environment at a temperature of 28–35 °C, away from the source of heat. Best Before 12 months.

SAFETY RULES:

Keep out of reach of children. Wear appropriate protective clothing, gloves, and eye/face protection. If skin contact occurs, wash immediately with plenty of clean water. If eye contact occurs, rinse thoroughly with clean water and seek medical attention. For professional use only.

For more information, please refer to the relevant Material Safety Data Sheet, available upon request.

DUSH 

Toll Free No: 18008910133, E-MAIL: india@dushproducts.com

Website: dushproducts.com

Italy 

Via Roma, 2 Lancenigo di Villorba-31020, Treviso(TV) ITALY

DISCLAIMER:

Before using any Dush products, test on a small, inconspicuous area to ensure compatibility and understand the application process. Results may vary based on application methods, surface conditions, and climate factors such as temperature and humidity. While Dush aims to provide high-quality products, we cannot guarantee specific results due to these variables. By using Dush products, you acknowledge and accept that Dush shall not be held liable for any damage or unsatisfactory results arising from their use or misuse.